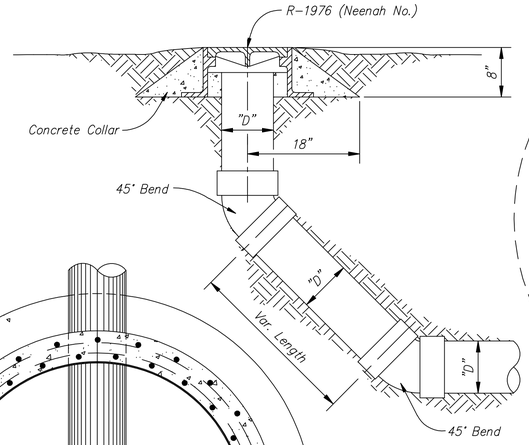

TEMPORARY SANITARY SEWER CLEANOUT

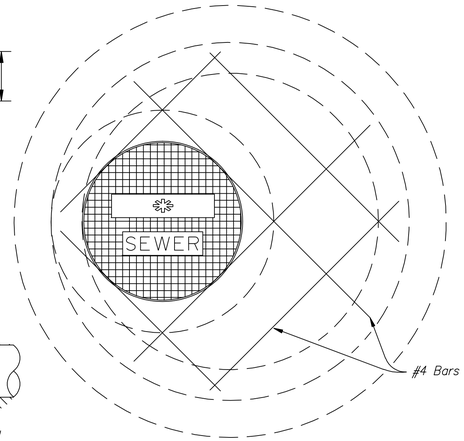

PLAN

SUMMARY OF MANHOLES				
STATION	NO.	IE	TYPE	"D"

STREET MANHOLE RING & COVER:

DEETER 1266 OR EQUAL

Street MH Ring & Cover 240 Lb. Min.

Street Manhole Ring & Cover to be Machined.

GENERAL NOTE:

Precast Manholes Shall Conform to ASTM Specification C 478-70, with Revisions.

✿ SANITARY OR STORM SEWER

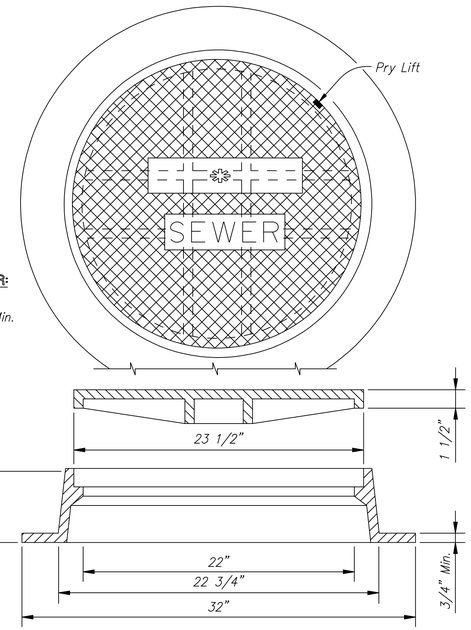

STANDARD MANHOLE RING & COVER

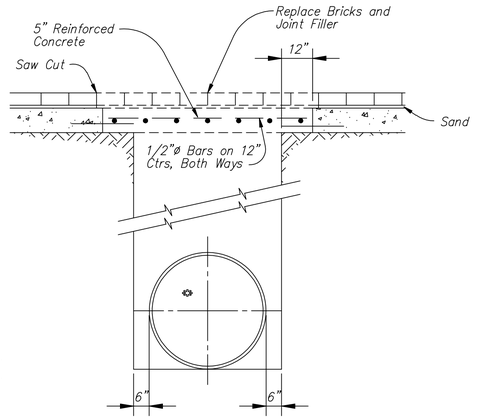

DETAIL "E"

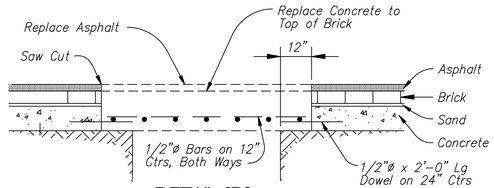

DETAIL "D"

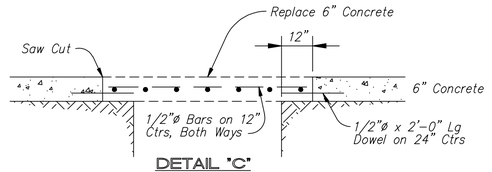

DETAIL "C"

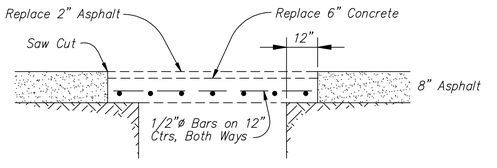

DETAIL "B"

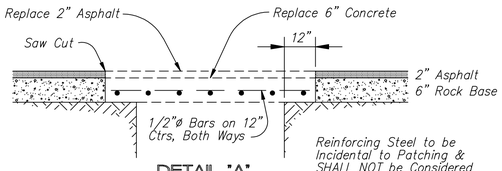

DETAIL "A"

Reinforcing Steel to be Incidental to Patching & SHALL NOT be Considered an Extra Pay Item.

PAVEMENT CUTTING DETAILS

GENERAL NOTES:

1. All structures within roadway shall be backfilled with excavatable flowable fill mix, 95%.
2. All utility patches within roadway shall be backfilled with excavatable flowable fill mix or suitable material, 95%.

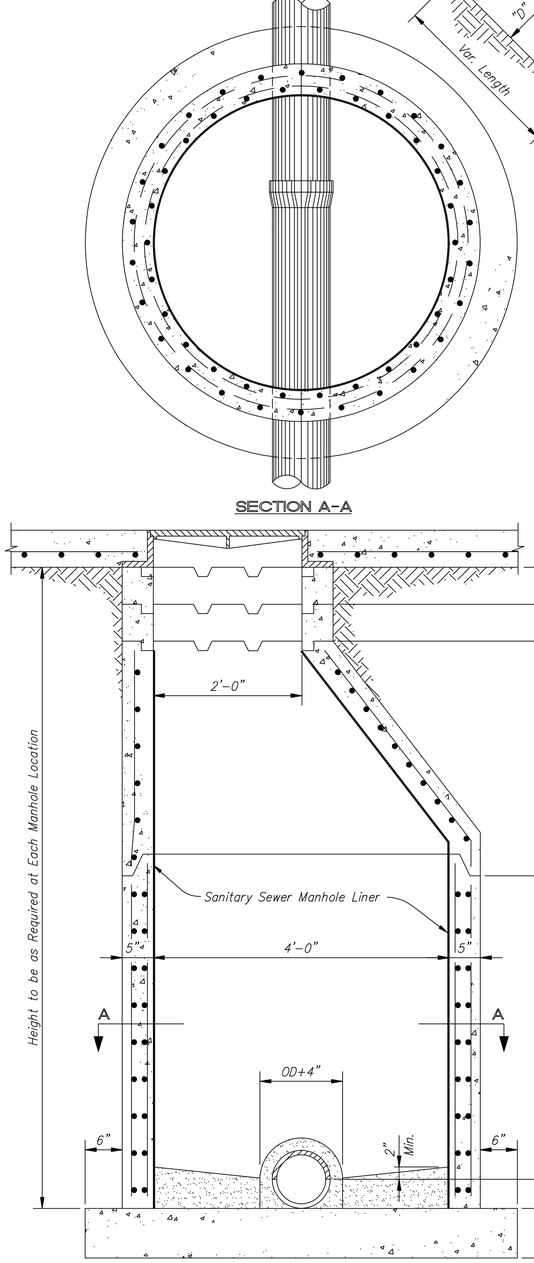

DETAIL OF STANDARD MANHOLE - TYPE "I"

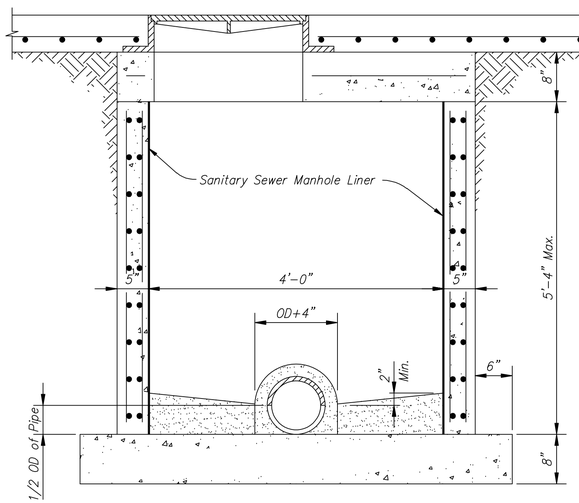

DETAIL OF SHALLOW MANHOLE - TYPE "II"

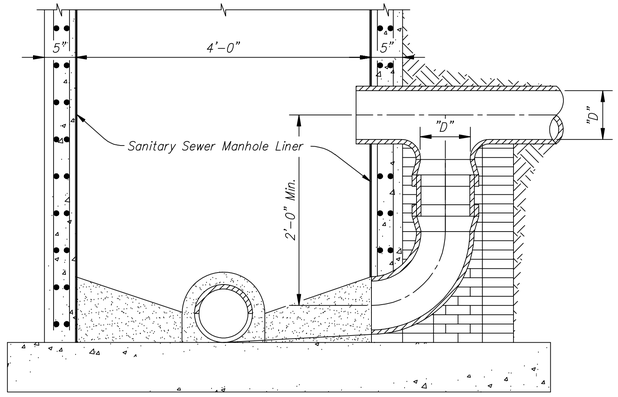

DETAIL OF DROP MANHOLE

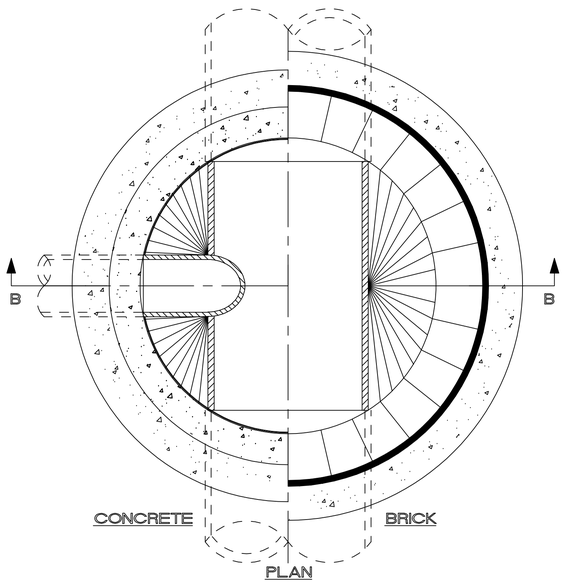

PLAN

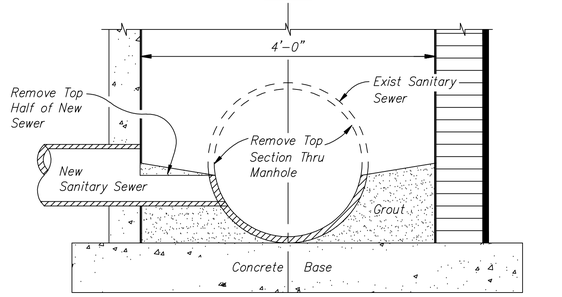

SECTION B-B

NEW SEWER CONNECTION

(Manhole Connected over Exist SS Main)

STANDARD DETAILS-
SANITARY/STORM SEWER

CITY OF SALINA
Dept. of Public Works
Engineering Division

300 W. Ash St, SALINA, KANSAS 67401
PH: 785.309.5725 FAX: 785.309.5713

PROJECT NO.:	DATE:	SCALE:	FILENAME:
DESIGN BY:	DRAWN BY:	APPROVED:	SHEET OF